




如本印章非红色, 则表明该文件为非受控版本, 不会受到控制和更新. 请使用受控文件.
分发号:

受控章

| Rev. | Date | Note |
|------|------------|---------|
| 1 | 2009.08.04 | Primary |
| 2 | | |

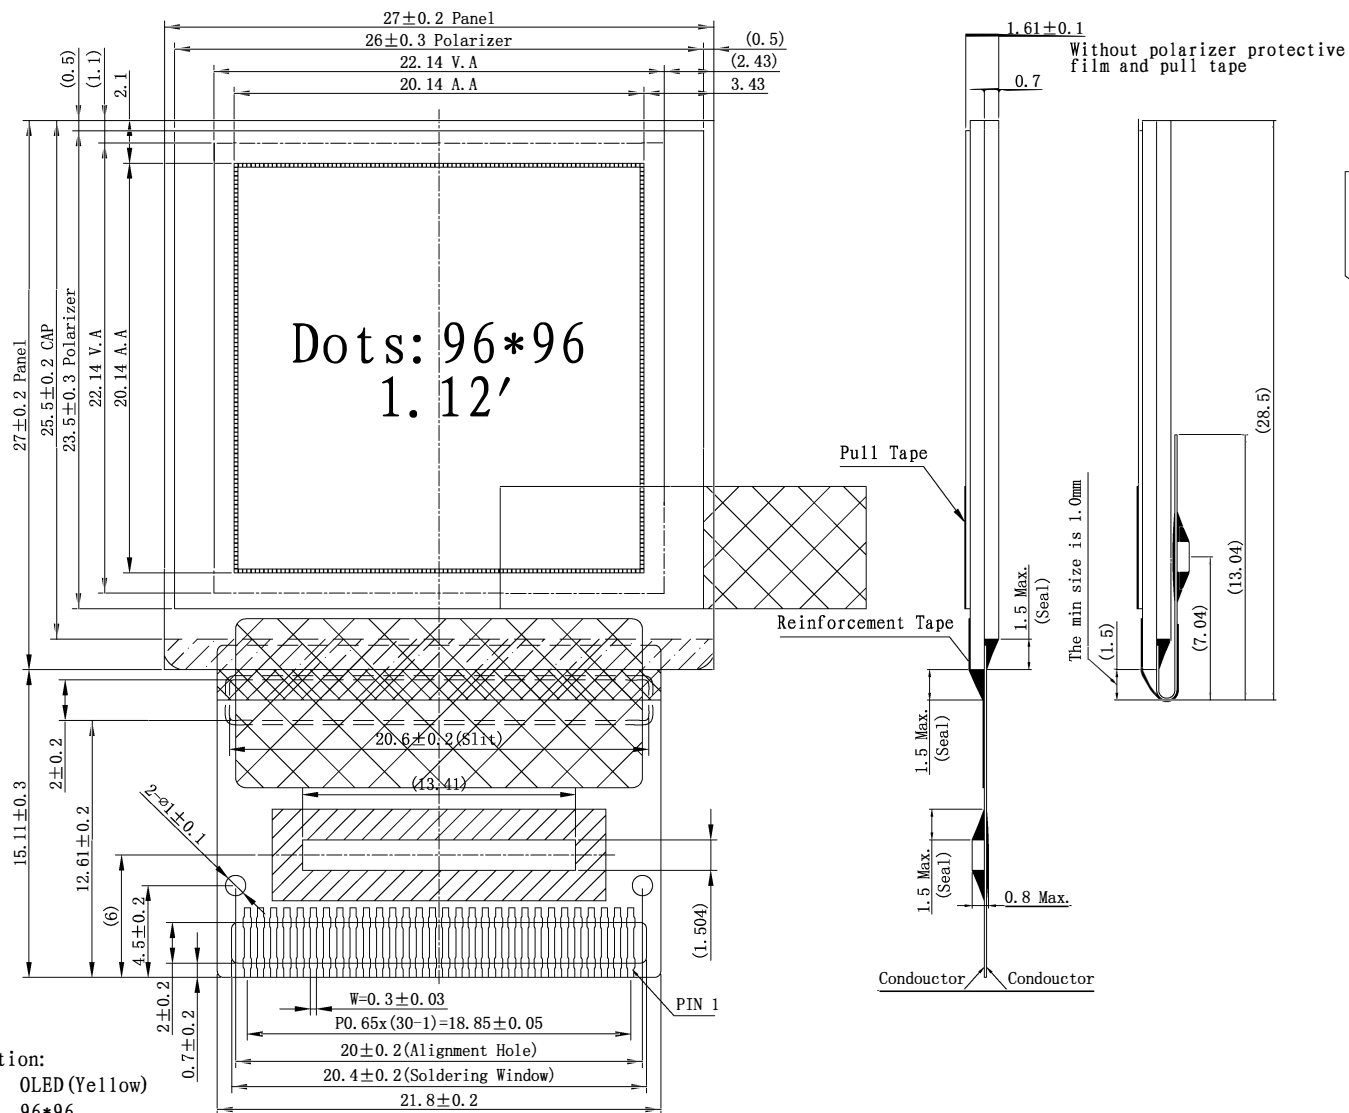

| Pin Assignment | |
|----------------|--------|
| NO. | SYMBOL |
| 1 | NC |
| 2 | NC |
| 3 | NC |
| 4 | NC |
| 5 | NC |
| 6 | NC |
| 7 | VCHS |
| 8 | VCOMH |
| 9 | VSS |
| 10 | LVSS |
| 11 | BS1 |
| 12 | BS2 |
| 13 | IREF |
| 14 | CS# |
| 15 | RES# |
| 16 | D/C# |
| 17 | R/W# |
| 18 | E |
| 19 | D0 |
| 20 | D1 |
| 21 | D2 |
| 22 | D3 |
| 23 | D4 |
| 24 | D5 |
| 25 | D6 |
| 26 | D7 |
| 27 | VDDIO |
| 28 | VDD |
| 29 | VCC |
| 30 | NC |

Specification:

1. Display: OLED (Yellow)
2. Format: 96*96
3. Driver IC: SSD1329T1R1
4. DUTY: 1/96
5. Operate Temp: -40° C ~ 70° C
Storage Temp: -40° C ~ 80° C
6. General Tolerance: ± 0.3
7. ROHS Compliant

| | | | | | | |
|--------------------------------|--------------|--------------|------------|----------|----------|----------|
| Customer Approval Signature | Part Name | Module Ass'y | Date | Rev. | Unit | Sheet |
| | Project Code | 00430 | 2009.08.04 | 01 | mm | 1/1 |
| | Part No. | 00430-MA1-A | DES'D BY | CHK'D BY | CHK'D BY | APPROVED |

Visionox 维信诺

