


1. Intel® Bay Trail-D/M/I processor
2. Support 1 * DDR3L 1333/1066MHz Single/Dual CH up to 4GB/8GB
3. Integrated Realtek ALC887 HD Audio CODEC with 2-CH
4. 1 * 24-bits Dual Channel LVDS header
5. Support 2 * HDMI Ports
6. Support 2 * Intel® 82583V GbE LAN
7. Support 1 * USB3.0, 5 * USB2.0
8. Support 1 * SATAII
9. Support 1* COM Port
10. +9~24V Wide range DC-in PWR jack
11. NUC Form Factor (101mm * 101mm)




Rear I/O

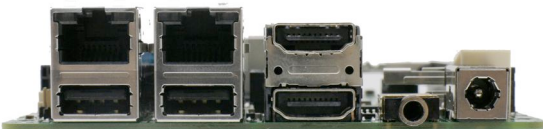

Front I/O



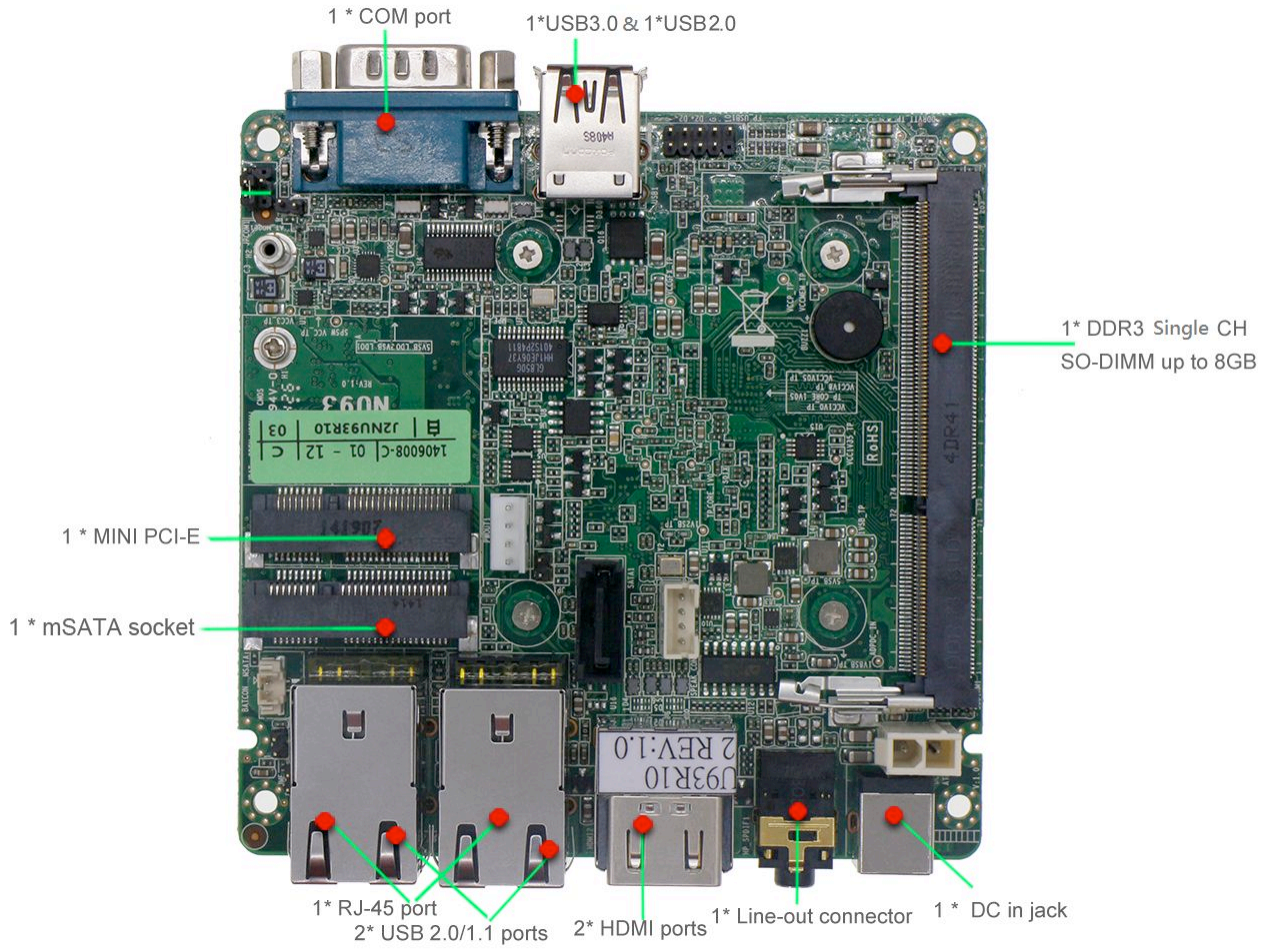

Form Factor	
Dimensions	- NUC (101 * 101 mm)
Processor System	
CPU	- Intel® Baytrail-D/M/I Processor - Supports Hyper-Threading Technology
Core Number	- by CPU
Max Speed	- by CPU
L2 Cache	- by CPU
Chipset	- N/A
BIOS	- UEFI
Expansion Slot	
PCI	- 0
Mini-PCIe	- 1 (half size)
mSATA	- 1 (full size)
PCIe	- 0
CFast Card Socket	- 0
CF Card Socket	- 0
Memory	
Technology	- Single/Dual Channel DDR3L 1333MHz SDRAM (By CPU)
Max.	- 4GB/8GB
Socket	- 1 * SO-DIMM slot
Graphics	
Controller	- Intel® HD Graphics
VRAM	- Shared Memory
VGA	- 0
LVDS	- 0
HDMI	- 2, Support Max. resolution 1920 * 1200
DVI-I	- 0
DisplayPort	- 0
MultiDisplay	- Yes (Dual Display)
Ethernet	
Ethernet	- 10/100/1000 Mbps
Controller	- GbE LAN: Intel® 82583V
Connector	- 2 * RJ 45
SATA	
Max Data Transfer Rate	- 1 * SATAII (3.0GB/s)
Front I/O	
USB	- 1 * USB 3.0, 1 * USB2.0
Serial	- 1 (Support RS232/422/485, 5V/12V Selectable)
Rear I/O	
VGA	- 0
DVI-I	- 0
HDMI	- 2

Product Specifications



Ethernet	- 2
USB	- 2 (2 * USB 2.0)
Audio	- 1 (Line-out support SPDIF)
Serial	- 0
eSATA	- 0
PS2	- 0
DC-input	- 1
Internal Connector	
USB	- 2 (2 * USB 2.0 via 10pin header)
PS2	- 0
LVDS / inverter	- 0
VGA	- 0
Serial	- 0
SATA	- 1 * SATAII (3.0GB/s)
mPCIe	- 1 (half size)
Parallel	- 0
mSATA	- 1 (full size)
CIR	- 0
GPIO 8-bit	- 0
Chassis intrusion	- 0
Audio Header	- 1 (Support 3W Amplifier)
Watchdog Timer	
Output	- From Super I/O to drag RESETCON#
Interval	- 256 segments, 0,1,2...255sec/min
Power Requirements	
Input PWR	- +9~24V DC-in (2-pin PWR Con)
Power On	AT/ATX Supported - AT : Directly PWR on as Power input ready - ATX: Press Button to PWR on after Power input ready
Certifications	
Certifications	- CE, FCC, RoHS, REACH
Environment	
Temperature	- Operating: 0°C – 60°C - Storage: -20°C – 85°C

- For further information please visit the website at <http://www.jetway.com.tw>
- The Specification may be changed without further notice.

Product Accessories

Parts	Manual	CD Driver	SATA cable	SATA Power cable
P/N	G03-NU93-F	G02-DVD20-A7-WF	G01-SATAL-RD30-F	G01-XH4-SA15-35F
Q'ty	1	1	1	1



Product Application				
V	Panel PC (工業平板電腦)	V	Medical (醫療)	POE/Surveillance (安防監控)
V	Commercial (商業應用)	V	POS/KIOSK (零售系統)	Power (電力系統)
V	Banking (銀行金控)	V	Industrial Automation (工業自動化)	Mobile (移動系統)
	Military (軍方應用)		Transportation (交通)	Storage(Nas) (存儲系統)
V	Digital Signage (數字標牌)		Telecom (通訊)	V I.O.T(物聯網)
V	Gaming (博奕)		Networking (網絡應用)	V AIO(一体機)