
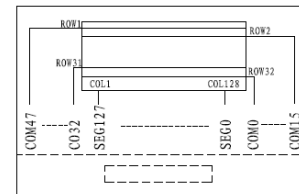
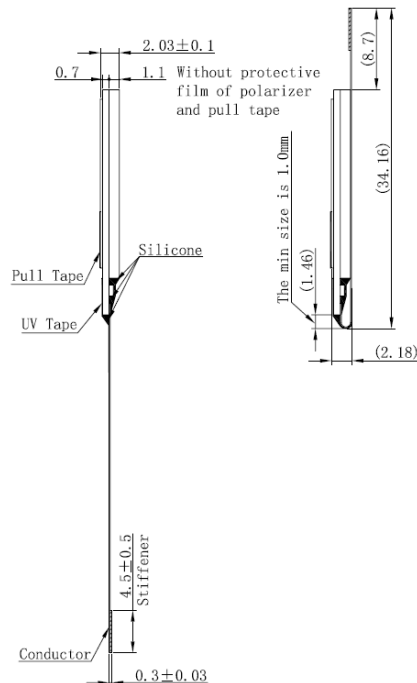



如本印章非红色, 则表明该文件为非受控版本, 不会受到控制和更新. 请使用受控文件.
分发号:

受控章

Rev.	Date	Note
①	2011.07.25	Base on 00950: Modify the display color(blue→amber)
②		

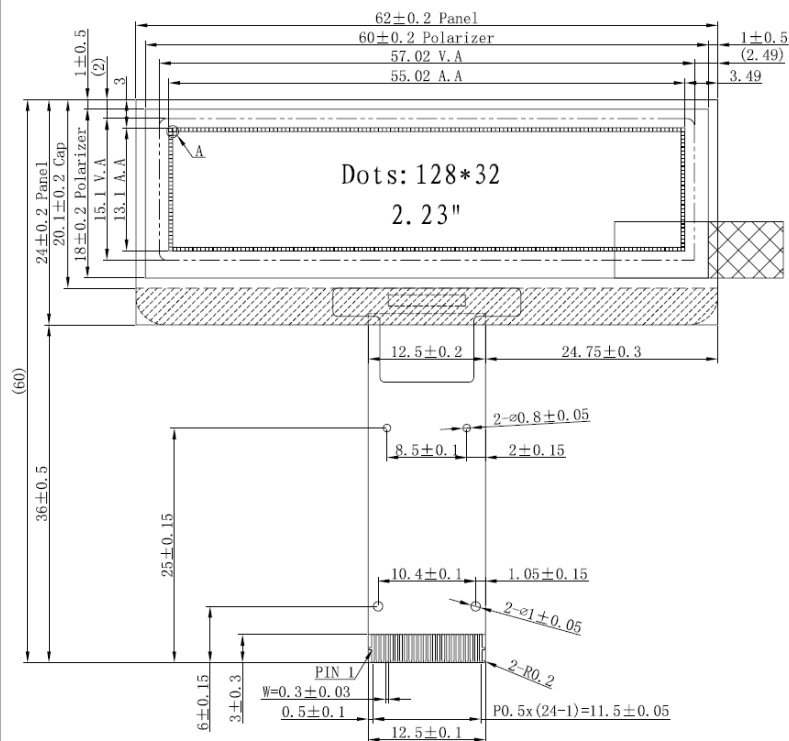

COM&SEG LAYOUT



Detail A (20:1)

Pin Assignment

NO.	SYMBOL
1	NC (GND)
2	VLSS
3	VSS
4	NC
5	VDD
6	BS1
7	BS2
8	CS#
9	RES#
10	D/C#
11	R/W#
12	E/RD#
13	D0
14	D1
15	D2
16	D3
17	D4
18	D5
19	D6
20	D7
21	IREF
22	VCOMH
23	VCC
24	NC (GND)

Specification

1. Display: OLED(Amber)
2. Format: 128*32
3. Driver IC: SSD1305Z
4. General Torlecrece: ±0.3
5. Operate temp: -40°C ~ 70°C
Storage temp: -40°C ~ 85°C
6. DUTY: 1/32
7. RoHS Compliant

Customer Approval Signature	Part Name	Module ass'y	Date	Rev.	Unit	Sheet
	Project Code	0095H	2011.07.25	01	mm	1/1
	Part No.	0095H-MA1-A	DES' D BY	CHK' D BY	CHK' D BY	APPROVED



PRODUCT SPECIFICATION

Mechanical Drawing



ASTONE TECHNOLOGY

41-43, rue Périer

92120 Montrouge - FRANCE

Téléphone : +33 (0)1 55 58 04 04 Fax : +33 (0)1 55 58 04 00